




Acqiris SA108P

8-bit ADC Card, up to 1 GS/s, 1 channel

with FPGA signal processing

Preliminary datasheet

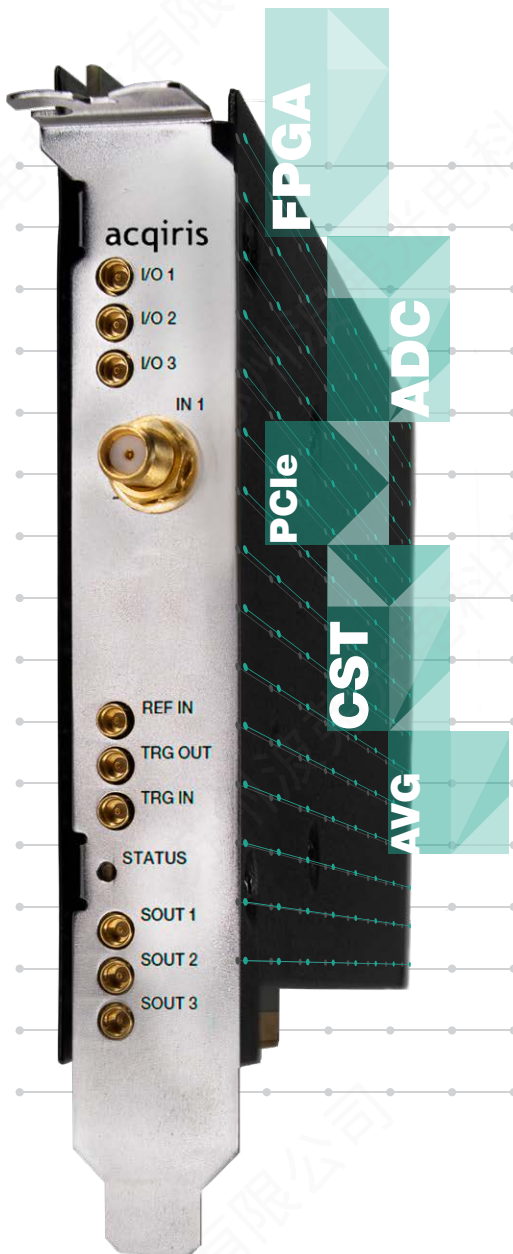

New generation of Signal Acquisition cards

The SA1 is Acqiris's low-power, low footprint 8-bit ADC card platform, performing fast signal acquisitions from 500 MS/s up to 2 GS/s, with advanced on-board signal processing capability. This new generation of ADC card focuses on addressing unique high-volume OEM application needs.

The SA108P is the single channel, up to 1 GS/s version of the SA1 product line. This new 8-bit ADC card provides a DC-Coupled front-end with multiple programmable low full scale range and the ability to synthesize 3 synchronized outputs for a tight instrument control.

Product description

All the ADC cards from the SA1 generation implement a proprietary low noise front-end and a Xilinx Ultrascale FPGA allowing a low-power implementation of advanced custom real-time processing algorithms.

This makes the SA1 ADC cards ideal for OEM applications requiring a reliable, stable and cost effective signal acquisition solution.

The PCIe Gen 3 interface enables low latency, high data transfer rate and streaming capabilities to the host computer at up to 6 GB/s.

This ADC card occupies a single PCIe slot, offering high performances in a small footprint.

Essential features

Accurate and precise measurement

- 8-bit resolution
- Up to 1 GS/s sampling rate on 1 channel
- DC up to 500 MHz analog bandwidth
- DC coupled, 50 Ω input impedance
- 50 mV to 1 V, selectable full scale range
- Programmable DC offset ($\pm 0.6 * FSR$)
- 10MHz / 100MHz external reference support

Signal fidelity

- Low noise density and low distortion
- Selectable low full scale range 50 mV to 1 V

Features depending on your application (options)

Increased recording time:

- Up to 4 GB memory allowing for 4 GSamples acquisition memory
- Streaming capability up to 6 GB/s

Real-time processing:

- Real-time averaging
- Simultaneous acquisition and readout, enabling streaming with high data throughput

For information on specific application,
please contact us:
support@acqiris.com

Integration in your system

Benefit from responsive signal acquisition solutions for your application.



Applications

Because each OEM project is unique, we develop data acquisition cards based on standard platform that can be fine-tuned to address your particular challenges.

We propose signal acquisition solutions which are easy to integrate in your system, fitting your actual requirements, and including only what you need.

The SA108P includes an on-board FPGA offering real-time signal processing capability such as waveform averaging. We also propose to open the FPGA for custom real-time processing.

More than a digitizer, the ADC Card's programmable I/O combined with SOUT capability allow for a tight system control.

This PCIe card with advanced real-time processing capabilities is specially designed for embedded OEM applications in a variety of challenging measurements, imaging and processing systems, including:

- Analytical time-of-flight (TOF)
- Ultrasonic non-destructive testing
- Medical research and imaging instrumentation
- Environmental monitoring using laser scanning (LiDAR)
- Distributed strain and temperature sensors (DSTS)

Overall performance of the SA108P enables deeper, faster and more accurate measurement and analysis for final products.

Software platform

Easy software integration

The ADC cards of the SA1 family are supplied with a comprehensive portfolio of module drivers, documentation, examples, and software tools to assist you to quickly develop your system with your software platform of choice.

Additionally, our integration experts are there to help you.

Compliance

Designed to benefit from very fast data interface, the product is compliant with PCI Express Gen3 x8 standard.

Drivers

The module comes with Windows or Linux drivers that work in the most popular development environments, to make easier the integration in your system.

Standard compliant drivers: IviDigitizer class-compliant Ivi-C and Ivi.NET drivers

Supported application development environments (ADE):
- VisualStudio (VB.NET, C#, C/C++)
- any ADE supporting C or .NET APIs

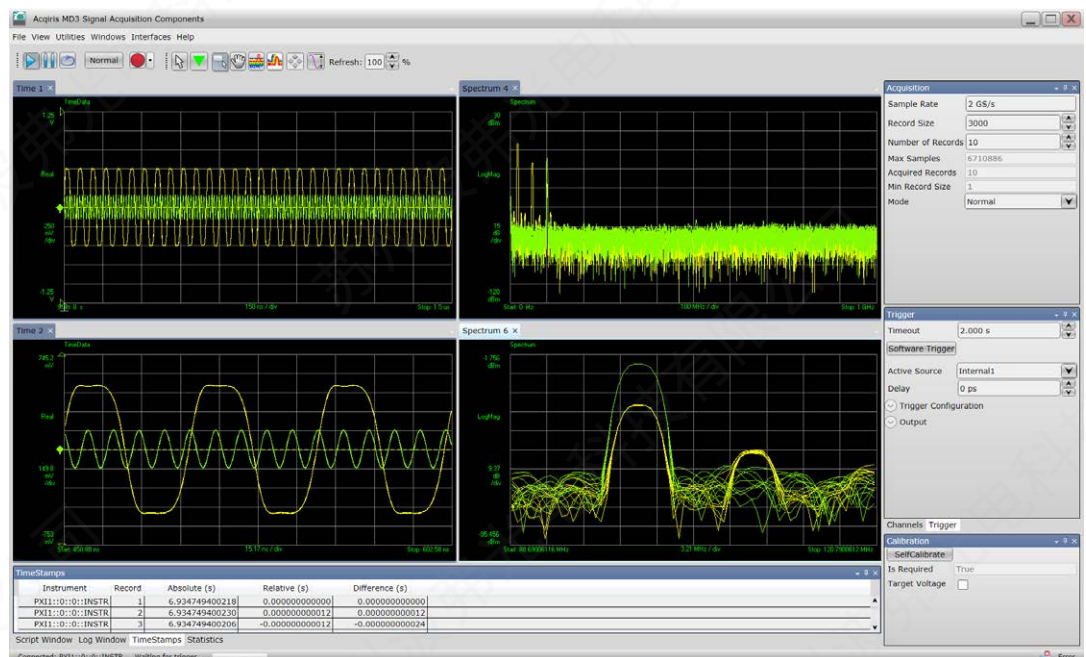


Figure 1. The software front panel (SFP) interface can display acquired data in time domain, frequency domain and provide additional useful information, such as the list of trigger time-stamps.

Software applications

In addition, all the SA1 family cards include the soft front panel (SFP) graphical user interface.

This software application can be used to initially explore the ADC card main capabilities and as a debugging tool during the development phase.

It serves as a user-friendly and convenient tool for capturing and displaying the acquired data in time or frequency domain.

For further integration in your application, our experts can help by providing code snippets.



Hardware platform

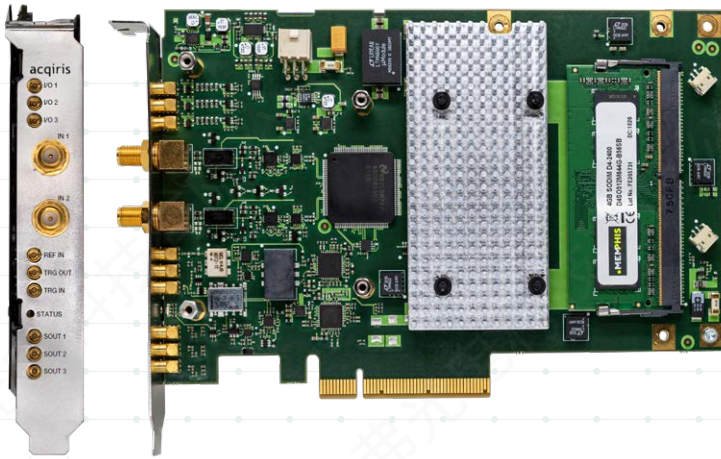


Figure 2. SA1 ADC card - Front panel, with analog inputs, multiple programmable I/O signals and unique synchronized I/Os. Open view.

Integration

In a host computer or externally, the SA108P signal acquisition card occupies a single half-length PCIe x8 slot, and, additionally, a fan assembly¹ is attached to the rear for effective cooling.

On-board real-time processing

At the heart of the SA108P ADC card is a data processing unit (DPU) based on the Xilinx Kintex UltraScale FPGA.

This DPU controls the digitizer functionality by implementing digitization of the signal, data storage in the DDR4 SDRAM memory and transfer through the PCIe connection to the host computer.

Moreover, this powerful feature allows real time signal processing and data reduction to be carried out on-board, minimizing transfer volumes and speeding-up analysis.

Block diagram

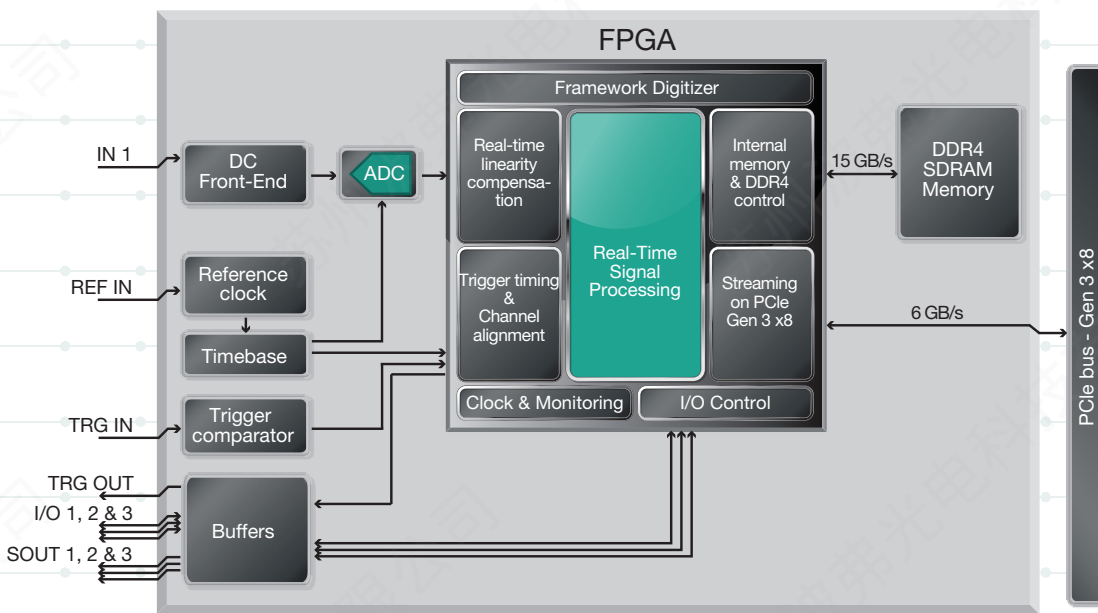


Figure 3. Top level block diagram of the SA108P PCIe ADC card, with on-board real-time processing.

Firmware (FPGA)

The firmware in the ADC card's FPGA enables real-time signal processing. Each firmware has different acquisition modes themselves having various features, including data compression or noise reduction.

Input channel

The full scale range (FSR) of the input channel can be selected by software from 50 mV to 1V.

Trigger

The trigger source can be a signal level acquired on the input channel (IN 1), or an external signal applied on TRG IN, or a software trigger.

Programmable I/Os

Three programmable I/Os and three synchronized outputs are available for your system control and optimization.

1. See page 7 for full dimension with fan assembly.

Application options

Firmware features

Accurate trigger timing

When using an external trigger, the digitizer accurately measures and stores the time of each trigger. This information is essential to determine the precise relation between the trigger and the signal digitized samples. The trigger time interpolator (TTI) is a high-precision integrated time-to-digital converter that guarantees trigger time-stamp measurement accuracy.

Easy mode switch

A simple call to the configuration function allows to automatically switch from the digitizer to the average mode.

Simultaneous acquisition and readout - Streaming records (CST)

Combined either with the digitizer or averaging mode, this function allows to perform simultaneously: signal acquisition, real-time processing and readout of acquired and processed data.

Compared with standard mode, it allows longer acquisition duration, and is especially dedicated to applications requiring no trigger loss.

Benefitting from the PCIe Gen 3 interface, the SA108P sustains data transfer to the host at up to 6 GB/s.

Real-time processing matching your system needs

The firmware in the ADC card's FPGA enables real-time signal processing. Each firmware has different acquisition modes themselves having various features, including data compression or noise reduction. This results in fine-tuned FPGA firmware allowing the on-board processing to be optimized for your specific applications.

Main ADC card modes:

- Digitizer (DGT)
- Real-time averaging (AVG option)

Optional feature:

- Simultaneous acquisition and readout - Streaming records (CST option)

Digitizer mode (DGT)

The digitizer firmware allows standard data acquisition, including:

- Digitizer initialization
- Setting of the acquisition
- Management of channel triggering for best synchronization
- Distortion reduction
- Storing data in the internal memory
- Transferring data to the host computer

The multi-record functionality allows to capture successive triggered events occurring within a very short time. The very fast trigger rearm time of the SA108P is a crucial feature to achieve low dead time. To increase trigger flexibility, a pre- or post-trigger delay can also be applied to the trigger position at picosecond resolution.

Furthermore, the binary decimation can be used to reduce the amount of data, lowering the sample rate by a factor of 2, 4, 8, and 16 – enabling decimated sampling rates from 500 MS/s to 31.125 MS/s.

Real-time averaging mode (AVG option)

Averaging signals reduces random noise effects, improving the signal-to-noise ratio as well as increasing resolution and dynamic range.

This mode enables synchronous real-time sampling and accumulation at 1 GS/s, featuring:

- Accumulation from 1 to > 65 000 triggers
- Effective acquisition length up to 524288 Samples
- Noise suppressed accumulation (NSA)
- Self-trigger mode for minimal synchronous noise
- Decimation factors of 2, 4, 8, 16 or 32 with associated anti-aliasing low pass filters, enabling decimated sampling rates at 500 MS/s, 250 MS/s, 125 MS/s, 62.5 MS/s or 31.25 MS/s.

The streaming capability of the SA108P allows to readout previously averaged record while performing a new accumulation. The averaging firmware enables multiple and successive averaging sequences without missing any trigger.



Technical specifications and characteristics

| Analog input (IN - SMA connectors) | | |
|---|--------------|---|
| Number of channel | | 1 |
| Impedance ¹ | | 50 Ω ± 2 % (typical) |
| Coupling | | DC |
| Full scale range (FSR) | -LVR | 50 mV, 100 mV, 200 mV, 500 mV, and 1 V (selectable by software) |
| Maximum input voltage | | ± 1.4 V DC |
| Input voltage offset | | ± 0.6 * FSR |
| Input frequency range (-3 dB bandwidth) | -F03 -F05 | DC to 300 MHz (typical) DC to 500 MHz (typical) |
| Effective numbers of bits (ENOB) ² | @ 100 MHz | 6.8 (typical) |
| Signal to noise distortion (SNR) | @ 100 MHz | 43 dB (typical) |
| Spurious free dynamic range (SFDR) | @ 100 MHz | 50 dBc (typical) |
| Total harmonic distortion (THD) | @ 100 MHz | -48 dB (typical) |

| Digital conversion | | |
|--|--------------|---|
| Resolution | | 8 bits |
| Acquisition memory | -MEA -MEB | 1 GB (1 GSamples) (default) 4 GB (4 GSamples) (optional) |
| Sample clock source | | Internal |
| Internal clock source | | Internal, external 10 MHz or 100 MHz reference |
| Real-time sampling rate | | 1 GS/s |
| Sampling clock jitter ³ | | 500 fs (nominal) |
| Clock accuracy | | ± 1.5 ppm (typical) |
| External reference clock (REF IN - MMCX connector) | | |
| Impedance | | 50 Ω (typical) |
| Frequency range | | 10 MHz ± 1 kHz 100 MHz ± 1 kHz |
| Signal level | | -3 dBm to +3 dBm (nominal) |
| Coupling | | AC |
| Acquisition modes | | Single record, Multi-record, Streaming |

| Trigger | |
|--|---|
| Trigger mode | Positive or negative edge |
| Trigger source | External, Channel, Software |
| Channel trigger frequency range | DC to 500 MHz (nominal) |
| Trigger time interpolator precision | 35 ps RMS (nominal) |
| Rearm time (deadtime) | < 250 ns (nominal) |
| External trigger (TRG IN - MMCX connector) | |
| Coupling | DC |
| Impedance | 50 Ω |
| Level range | ± 5 V |
| Minimum amplitude | 0.5 V pk-pk |
| Frequency range | DC to 1 GHz |
| Trigger out (TRG OUT - MMCX connector) | 1 (programmable), 20 Ω source, 2.2 V typ on 50 Ω charge |

1. Input impedance is 150 Ω during the self-calibration process.
2. Measured for a -1 dBFS input signal in internal clock mode at 1 GS/s.
3. Jitter figure based on phase noise integration from 100 Hz to 100 MHz in internal reference.

Calibration

The SA108P is factory calibrated and delivered with a certificate of calibration.

Definitions for specifications

Specifications describe the warranted performance of calibrated cards that have been stored for a minimum of 2 hours within the operating temperature range of 0 to 50 °C, unless otherwise stated, and after a 45-minutes warm-up period. Data represented in this document are specifications unless otherwise noted.

Characteristics describe product performance that is useful in the application of the product, but that is not covered by the product warranty. Characteristics are often referred to as Typical or Nominal values.

- Typical describes usual performance, which 80 % of cards will meet when operated over a 20 to 30 °C temperature range. Typical performance is not warranted.
- Nominal describes representative performance that is useful in the application of the product when operated over a 20 to 30 °C temperature range. Nominal performance is not warranted.

Technical specifications and characteristics

Programmable IO (I/O 1, 2 and 3 - MMCX connectors)

| | | |
|--------------------|------|--|
| Output functions | | Acquisition active Trigger is armed Trigger accept re-synchronization Reference clock out |
| | -AVG | Self-trigger |
| | -AVG | Accumulation active |
| Output level range | | DC coupling, 50 Ω source, LVCMOS 3.3 V |
| Input function | -AVG | Accumulation enable |
| Input level range | | DC coupling, LVCMOS 3.3 V, max. voltage +5 V |

Serial Outputs (SOUT 1, 2 and 3 - MMCX connectors)

| | | |
|-----------------|--|---------------------------------|
| Output coupling | | DC coupling, 20 Ω source |
| Output voltage | | 3.0 V DC (Without charge) |

System requirements¹

| Topic | Windows | Linux |
|----------------------|--|---|
| Operating systems | Windows 10 (32-bit and 64-bit), All versions | Linux Kernel 2.6 or higher (32 or 64-bit), Debian, Ubuntu, CentOS |
| Processor speed | 1 GHz 32-bit (x86), 1 GHz 64-bit (x64), no support for Itanium 64 | As per the minimum requirements of the chosen distribution |
| Available memory | 1 GB minimum | As per the minimum requirements of the chosen distribution |
| Available disk space | 1.5 GB available hard disk space, includes 1 GB for Microsoft .NET Framework | 100 MB |
| Display | Minimum of 1024 x 768, 96 or 120 DPI | No display required |
| Temperature range | Check upon environment requirement. It might not allow to go as high as ADC card allows. | |

1. Contact support@acqiris.com for a list of recommended host computers.



| Environmental and physical | | |
|-----------------------------|----------------------------|---|
| Usage | | Indoor use recommended (outdoor is possible provided the ADC card is within an environment that guarantee indoor conditions) |
| Pollution degree | | 2 |
| Temperature range | Operating ^{1,2} | 0 to +50 °C (sea-level to 10,000 feet) |
| | | 0 to +45 °C (10,000 to 15,000 feet) |
| | Non-operating | -40 to +70 °C |
| Altitude | | Up to 15,000 feet (4 572 meters) |
| Relative humidity range | Operating ³ | 10 % to 90 % RH, non-condensing |
| | Non-operating ³ | 5 % to 95 % RH, non-condensing |
| Electro-magnetic compliance | | Complies with European EMC Directive 2014/30/EU EN 61326-1:2013 (industrial) EN 55011:2016 Group 1, Class B, industrial environment And with international standards : IEC 61326-1:2012 CISPR 11:2015 / AMD1:2016 USA: CFR 47 Part 15, Subpart B, Class B, digital device Australia/New Zealand: AS/NZS CISPR 11:2011 Canada: ICES/NMB-001:2006 |
| Safety | | The product was tested and is in conformity with: IEC 61010-1:2010 IEC 61010-1:2010 / AMD1:2016 And National differences: - EU Group Differences - EU Special National Conditions - EU A-Deviations - AU, CA, KR, US Complies with European LVD Directive 2014/35/EU EN 61010-1:2010 |
| Environmental | | Directive 2015/863/EU (RoHS 3) EN 50581 :2012 |
| Acoustic | | Acoustic noise emission LpA < 60 dB (<i>nominal</i>) Operator position, Normal operation mode |

| Power consumption ⁴ | |
|--------------------------------|---|
| + 3.3 V | Power on PCIe edge connector < 2.3 W (<i>nominal</i>) |
| + 12 V | Power on PCIe edge connector < 22 W (<i>nominal, firmware dependent</i>) |

| Mechanical characteristics | | |
|----------------------------|----------------------------|-------------------------------|
| Form factor | | PCIe x8 standard |
| Size | Without fan ⁵ | 21.5 W x 180.1 H x 126.3 D mm |
| | With rear fan ⁶ | 21.5 W x 245.1 H x 126.3 D mm |
| | With rear fan and retainer | 21.5 W x 351.3 H x 126.3 D mm |
| Weight | | < 370 gr (< 0.8 lbs) |

1. Host computer internal ambient temperature at intake of the digitizer's fan.
2. Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.
3. Tested in accordance with IEC 60068-2-30 and IEC 60068-2-78.
4. Power measured in digitizer mode.
5. 60 m³/h airflow is required. The unit must be operated with the included fan.
6. Optional card retainer can be ordered to stabilize the PCIe card in the host computer.

Quality

Samples of this product have been type tested and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions.



Configuration and ordering information

Ordering information

| Model | Description |
|---|--|
| SA108P | PCIe 8-bit ADC card with FPGA signal processing includes: – Fan assembled on module – 5-year standard warranty |
| Configurable options | |
| Additional Memory | |
| Firmware and application options | |
| Card retainer (recommended if the card is assembled horizontally or in harsh environment) | |



Accessories

| Model | Description |
|------------|----------------------------------|
| U5300A-101 | MMCX male to SMA male cable, 1 m |
| U5300A-102 | MMCX male to BNC male cable, 1 m |
| U5300A-001 | Card Retainer ¹ |
| U5300A-003 | Short card retainer ¹ |

1. Recommended if the card is assembled horizontally or in harsh environment.

Contacts

Headquarters

Acqiris SA
Chemin des Aulx 12
1228 Plan-les-Ouates / Geneva
Switzerland
+41 22 884 32 90

Acqiris Americas
contact-americas@acqiris.com

Acqiris Asia-Pacific
contact-asia-pacific@acqiris.com

Acqiris Europe
contact-emea@acqiris.com

Acqiris Japan
contact-japan@acqiris.com

Support
support@acqiris.com

This information is subject to change without notice.

Published in Switzerland,
March 2021